

The following pages were
extracted from the:

*COMPAQ SERVICE
QUICK REFERENCE GUIDE*

DP286N

COMPAQ DESKPRO 286N

BOARD COMPATIBILITY LIST

Product	Assy No.	Spare Part No.	Page
---------	----------	----------------	------

SYSTEM BOARDS

80286 System	001448	118738-001	90
--------------	--------	------------	----

MEMORY BOARDS

Memory Expansion	001457	118739-001	X
4 MB Memory Module	118665-002	118741-001	X
1 MB Memory Module	118666-001	113911-001	X

MISCELLANEOUS

Serial/Parallel Interface	000570	106886-001	A-8
Serial/Parallel Interface	000990	106886-001	A-9
2400-Baud Int Modem	001070	112693-001	X
Backplane Board	001451	118742-001	X

FIXED DISK DRIVES

Drive Size	Drive Type	Inter-leave	Inte-grated	Min ROM	Spare Part No.	Controller Assy No.
20 MB	2	1:1	Y	A	113959-001	N/A
40 MB	22*	1:1	Y	A	113960-001	N/A
60 MB	55	1:1	Y	A	113961-001	N/A
120 MB	50	1:1	Y	A	113962-001	N/A

* May be drive type 22 or drive type 17

DISKETTE DRIVES

Size	Spare Part No.
1.2 MB	112566-001
1.44 MB	113958-001

CABLE INFORMATION

Cable Function	Used With	Spare Part No.
Diskette Signal	1.2 MB Diskette	113938-001
Diskette Power	1.2 MB Diskette & Fixed Disk Drive	113939-001
Diskette Signal/Power	1.44 MB Diskette	113930-001
Mass Storage Power	All FDD	113927-001
Mass Storage Signal	All FDD	113928-001

DP286N

COMPAQ DESKPRO 286N

BOARD JUMPER/SWITCH SETTINGS

SYSTEM BOARD (001448)

SWITCH	SETTING	FUNCTION
SW1-1	ON*	Enable integrated VGA
SW1-1	OFF	Disable integrated VGA
SW1-2	ON*	Enable SETUP
SW1-2	OFF	Disable SETUP
SW1-3	ON*	Enable external boot
SW1-3	OFF	Disable external boot
SW1-4	ON*	Enable power-on password
SW1-4	OFF	Disable power-on password
SW1-5	ON*	8-MHz 80287 coprocessor or coprocessor not installed
SW1-5	OFF	12-MHz 80C287 coprocessor
SW1-6	ON*	Enable diskette write
SW1-6	OFF	Disable diskette write

* Default

PROCESSOR/COPROCESSOR LOCATIONS

Processor (80286-12) Coprocessor (80287-8 or 80C287-12)

Not field replaceable U60

SYSTEM ROM INFORMATION

SYSTEM ROM LOCATION

U81

SYSTEM ROM REVISIONS (Spare Part No. 118756-001)



Rev	PN on ROM
032690	118717-002
040590	118717-003
042590	118717-004
050390	118717-005
080290	118717-006

POWER SUPPLY

Spare Part No. 118743-001

BATTERY/CLOCK MODULE

Spare Part No. 107872-001

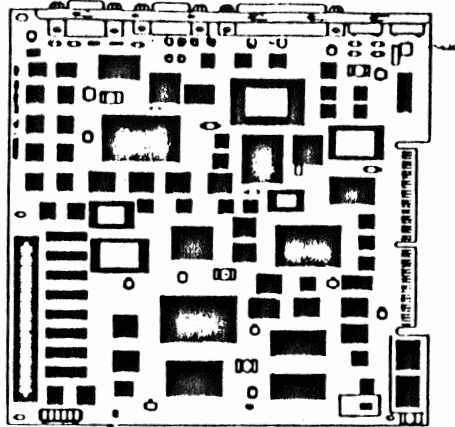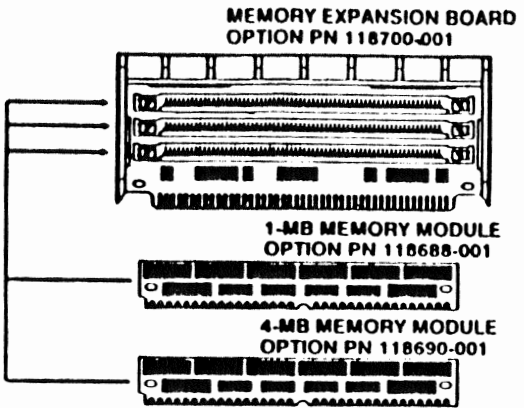

INSTALL MEMORY MODULES IN ANY COMBINATION AND IN ANY ORDER ON THE MEMORY EXPANSION BOARD

INSTALL MEMORY EXPANSION BOARD ON SYSTEM BOARD

MAXIMUM MEMORY: 13 MEGABYTES

COMPAQ DESKPRO 286N MEMORY UPGRADE CHART