


These drives use IDE "Integrated Drive Electronics" style interface.

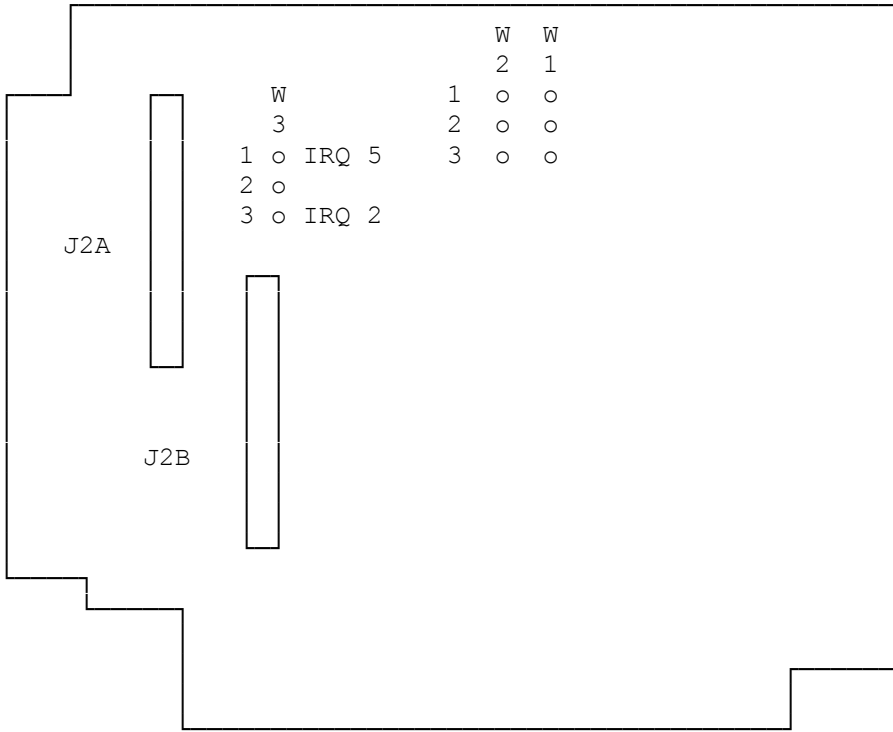

Jumpers are as follows:

- W1 1-2 BIOS address CA000 hex
- W1 2-3 BIOS address C8000 hex (default)
  
- W2 1-2 I/O port 320 hex Selects Drive C> (default)
- W2 2-3 I/O port 324 hex Selects Drive D>
  
- W3 1-2 IRQ5 (default)
- W3 2-3 IRQ2 (CORRECT SETTING FOR TANDY 1000 /A /SX /TX)

\* Note on the Tandy 1000 /A /SX /TX the W3 jumper needs to be changed to pins 2-3 for IRQ2 all other default values are correct.

(dkh-08/06/93)