

The following pages were
extracted from the:

*COMPAQ SERVICE
QUICK REFERENCE GUIDE*

DP386s/20

COMPAQ DESKPRO 386s/20

BOARD COMPATIBILITY LIST

Product	Assy No.	Spare Part No.	Page
---------	----------	-------------------	------

SYSTEM BOARDS

386SX System	001421	122131-001	121
--------------	--------	------------	-----

MEMORY BOARDS

4 MB Memory Module	118665-002	118741-001	X
1 MB Memory Module	118666-002	118740-001	X
2 MB Memory Module	118667-002	113923-001	X

CONTROLLER BOARDS

Tape Adapter	000774	113259-001	A-3
ESDI External 300/600	001091	115839-001	A-3
15 MHz ESDI Cntrl	001628	121667-001	A-4

VIDEO BOARDS

Advanced Graphics 1024	109958	114201-001	A-8
Advanced Graphics Memory	109959	114202-001	X
VGA Pass-Through	001430	114241-001	X

MISCELLANEOUS

Serial/Parallel Interface	000570	106886-001	A-8
Serial/Parallel Interface	000990	106886-001	A-9
2400-Baud Int Modem	001070	112693-001	X

DP386s/20

COMPAQ DESKPRO 386s/20

FIXED DISK DRIVES

Drive Size	Drive Type	Inter-leave	Inter-grated	Min ROM	Spare Part No.	Controller Assy No.
40 MB*	22	1:1	Y	A	112526-001	N/A
60 MB	55	1:1	Y	A	122079-001	N/A
120 MB	50	1:1	Y	A	122080-001	N/A
210 MB	51	1:1	Y	A	124013-001	N/A
300 MB ¹	38	1:1	N	A	113216-001	001628

* See page A-13 for single and dual fixed disk drive switch settings and configuration.

¹ Used in Fixed Disk Expansion Unit. Requires MS-DOS 3.3 or later.

NOTE: A fifth Fixed Disk Drive requires a rear dual drive bracket, Spare Part No. 122169-001

TAPE DRIVES

Drive Size	Spare Part No.	Tape Cartridge	Spare Part No.
40/60 MB	112524-001	40 MB (DC 2000)	108142-001
		60 MB	122086-001
80/120 MB	122087-001	80 MB	116966-001
		120 MB	116967-001
150/250 MB	115220-001	150 MB (DC 600 XTD)	113234-001
		250 MB	115298-001

DISKETTE DRIVES

Size	Spare Part No.
360 KB	112567-001
1.2 MB	112566-001
1.44 MB*	122392-001

* Requires MS-DOS Version 3.31 Revision A if installed as drive B, and MS-DOS Version 3.31 Revision B if installed as drive A.

DP386s/20

COMPAQ DESKPRO 386s/20

CABLE INFORMATION

Cable Function	Used With	Spare Part No.	
Diskette/Tape Signal	All Diskette Drives 40/60-MB Tape	113594-001	34 Pins
Diskette Signal/Power	1.44-MB Diskette	122158-001	
Mass Storage Power	Diskette & Tape Drives	122157-001	
Mass Storage Power	Single FDD	122156-001	6 In.
Mass Storage Power	Dual FDD	101741-004	
Tape Signal	80-/120- & 150-/250-MB Tape Drives	113198-002	
FDD Signal	FDD - Drive C	124006-001	40 Pins
FDD Signal	FDD - Drive D	112528-001	40 Pins
External I/O	Expansion Unit	130844-001	
Telephone Cable	Modem	112666-001	
VGA Pass-Through	Adv Graphics	114229-001	

BOARD JUMPER/SWITCH SETTINGS

SYSTEM BOARD (001421)

SWITCH	SETTING	FUNCTION
S1	ON*	Enable Integrated VGA
S1	OFF	Disable Integrated VGA
S2	ON*	Enable Power-On Password
S2	OFF	Disable Power-On Password

* Default

DP386s/20

COMPAQ DESKPRO 386s/20

PROCESSOR/COPROCESSOR LOCATIONS

Processor (386SX-20)	Coprocessor (387SX-20)
U26	U115

SYSTEM ROM INFORMATION

SYSTEM ROM LOCATION
U100


SYSTEM ROM REVISIONS (Spare Part No. 122171-001)	
Rev	PN on ROM
042590	122134-003

POWER SUPPLY

Spare Part No. 112570-001

BATTERY/CLOCK MODULE

Spare Part No. 107872-001

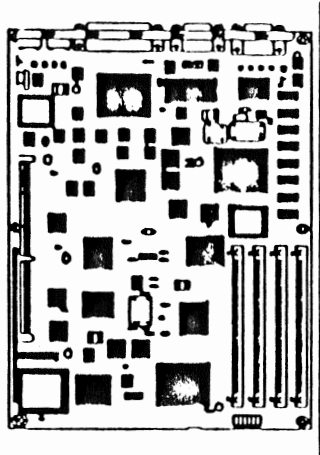

1-MB MEMORY MODULE
OPTION PN 118688-001



2-MB MEMORY MODULE
OPTION PN 118689-001



4-MB MEMORY MODULE
OPTION PN 118690-001



INSTALL ANY MEMORY MODULE IN
SLOT J1 ON THE SYSTEM BOARD;
THEN INSTALL MEMORY MODULES IN
ANY COMBINATION AND IN ANY
ORDER IN THE REMAINING SLOTS.

MAXIMUM MEMORY: 16 MEGABYTES

COMPAQ DESKPRO 386s/20 MEMORY UPGRADE CHART