

The following pages were
extracted from the:

*COMPAQ SERVICE
QUICK REFERENCE GUIDE*

DP386N

COMPAQ DESKPRO 386N

BOARD COMPATIBILITY LIST

Product	Assy No.	Spare Part No.	Page
---------	----------	----------------	------

SYSTEM BOARDS

386SX System	001496	113922-001	100
--------------	--------	------------	-----

MEMORY BOARDS

Memory Expansion	001457	118739-001	X
4 MB Memory Module	118665-002	118741-001	X
1 MB Memory Module	118666-001	113911-001	X
2 MB Memory Module	118667-002	113923-001	X

MISCELLANEOUS

Serial/Parallel Interface	000570	106886-001	A-8
Serial/Parallel Interface	000990	106886-001	A-9
2400-Baud Int Modem	001070	112693-001	X
Backplane Board	001451	118742-001	X

FIXED DISK DRIVES

Drive Size	Drive Type	Inter-leave	Inter-grated	Min ROM	Spare Part No.	Controller Assy No.
20 MB	2	1:1	Y	A	113959-001	N/A
40 MB	22*	1:1	Y	A	113960-001	N/A
60 MB	55	1:1	Y	A	113961-001	N/A
120 MB	50	1:1	Y	A	113962-001	N/A

*May be drive type 22 or drive type 17

DISKETTE DRIVES

Size	Spare Part No.
1.2 MB	112566-001
1.44 MB	113958-001

CABLE INFORMATION

Cable Function	Used With	Spare Part No.
Diskette Signal	1.2 MB Diskette	113938-001
Diskette Power	1.2 MB Diskette & Fixed Disk Drive	113939-001
Diskette Signal/Power	1.44 MB Diskette	113930-001
Mass Storage Power	All FDD	113927-001
Mass Storage Signal	All FDD	113928-001

DP386N

COMPAQ DESKPRO 386N

BOARD JUMPER/SWITCH SETTINGS

SYSTEM BOARD (001496)

SWITCH	SETTING	FUNCTION
SW1-1	ON*	Enable Integrated VGA
SW1-1	OFF	Disable Integrated VGA
SW1-2	ON*	Enable SETUP
SW1-2	OFF	Disable SETUP
SW1-3	ON*	Enable external boot
SW1-3	OFF	Disable external boot
SW1-4	ON*	Enable power-on password
SW1-4	OFF	Disable power-on password
SW1-5	ON*	Reserved
SW1-6	ON*	Enable diskette write
SW1-6	OFF	Disable diskette write

* Default.

PROCESSOR/COPROCESSOR LOCATIONS

System Board 001496

Processor (386SX-16) Coprocessor (387SX-16)

Not field replaceable U58

SYSTEM ROM INFORMATION

SYSTEM ROM LOCATION

U13

SYSTEM ROM REVISIONS (Spare Part No. 118775-001)


Rev	PN on ROM
032790	113915-003
040590	113915-004
042590	113915-005
050390	113915-006
080290	113915-007

POWER SUPPLY

Spare Part No. 118743-001


BATTERY/CLOCK MODULE

Spare Part No. 107872-001

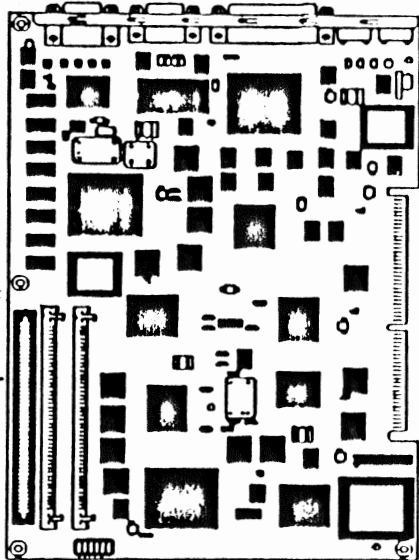

INSTALL MEMORY MOD-
ULES ON SYSTEM
BOARD

INSTALL MEMORY
EXPANSION BOARD
ON SYSTEM BOARD

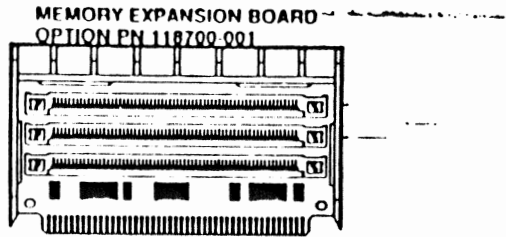

1-MB MEMORY MODULE
OPTION PN 118688-001



2-MB MEMORY MODULE
OPTION PN 118689-001



4-MB MEMORY MODULE
OPTION PN 118690-001



INSTALL MEMORY MOD
ANY COMBINATION AND
ORDER IN THE TOP TWO
ON THE MEMORY EXPA
BOARD

MAXIMUM MEMORY: 16
BYTES

COMPAQ DESKPRO 386N MEMORY UPGRADE CHART