

The following pages were  
extracted from the:

---

*COMPAQ SERVICE  
QUICK REFERENCE GUIDE*

# SLT/286

## COMPAQ SLT/286

### COMPATIBILITY LIST

Product	Assy No.	Spare Part No.	Page
---------	----------	----------------	------

#### SYSTEM BOARDS

80286 System	000851	110355-001	54
80286 System	001160*	110355-001	54

\* Comes with Memory Module (Assy No. 001163) mounted on system board.

#### MEMORY BOARDS

1 MB Memory	000857	110357-001	X
4 MB Memory	000863	110863-001	X

#### MISCELLANEOUS INTERNAL

2400-Baud Int Modem	000866	110352-001	X
Serial Interface	000854	110360-001	X
Backlight Invt	000908	110452-001	X
LED Indicator	000978	110453-001	X
Extender Connector*	000872	110600-001	X
CPU Connector*	001340	110601-001	X
Enhanced 2400-Baud Internal Modem	001556	118413-001	X
Advanced Graphics 1024*	109958	114201-001	A-8
Advanced Graphics Memory	109959	114202-001	X
CD-ROM Adapter	001638	110875-001	X

\* Used in Desktop Expansion Base only

#### MISCELLANEOUS EXTERNAL

Product	Option Part No.	Spare Part No.
External Numeric Keypad	110052-001	110454-001
Desktop Expansion Base	110059-001	N/A
Battery Pack	110287-001	110351-001
Automobile Adapter	110288-001	110708-001
External Battery Charger	110700-001	110708-001
External Storage Module	110281-001	N/A
AC Adapter	N/A	110353-001

# SLT/286

## COMPAQ SLT/286

### COMPATIBILITY LIST

#### FIXED DISK DRIVES

Drive Size	Drive Type	Inter-leave	Inte-grated	Min ROM	Spare Part No.	Controller Assy No.
20 MB	2	1:1	Y	F.2	110570-001	N/A
20 MB	2	3:1	Y	F.2	110359-001	N/A
40 MB	22	1:1	Y	F.2	110358-001	N/A

#### TAPE DRIVE

Drive Size	Spare Part No.	Tape Cartridge	Spare Part No.
40/60 MB*	112524-001	40 MB (DC2000)	108142-001
		60 MB	122086-001

\*Used in External Storage Module only.

#### DISKETTE DRIVES

Size	Spare Part No.
1.2 MB	112566-001 (Used in External Storage Module only.)
360 KB	112567-001 (Used in External Storage Module only.)
1.44 MB	110356-001

#### CABLE INFORMATION

Cable Function	Used With	Spare Part No.
Mass Storage Power	All FDD	110007-001
FDD Signal	All FDD	110008-001
Diskette Power/Signal	Internal Diskette	110005-001
Signal Cable	Ext Storage Module	110268-001
Power Cable	Ext Storage Module	110270-001
Ground Cable	Display	110503-001
Power Cord	AC Adapter	110543-001
Telephone Cable	Modem	112666-001
Cable Kit (4 Cables)		110551-001
Cable Kit (2 Cables)		110553-001

#### BOARD JUMPER/SWITCH SETTINGS

##### System Board (000851 & 001160)\*

J1 Settings	Function
1 to 2	8-MHz 80287
2 to 3	12-MHz 80C287

\*Jumpers E2, E3, and E4 reserved. These jumpers must be installed for proper board operation.

# SLT/286

## COMPAQ SLT/286

### JUMPER/SWITCH SETTINGS (Cont'd)

#### External Storage Module

---

Jumper	Function
F1p1	Enables diskette drive
Tape	Enables tape drive

#### PROCESSOR/COPROCESSOR LOCATIONS

Processor (80C286-12)	Coprocessor (80287-8 or 80C287-12)
U31	U45

#### SYSTEM ROM INFORMATION

##### System Rom Locations

---

U56 ODD  
U57 EVEN

##### System Rom Revision (Spare Part No. 110542-001)

---

Rev	PN on ODD ROM	PN on EVEN ROM
F.2	110091-002	110092-002
F.5	110091-003	110092-003
G.2	110091-005	110092-005
H.1	110091-006	110092-006
H.2	110091-007	110092-007
H.3	110091-008	110092-008
H.4	110091-009	110092-009
H.5	110091-010	110092-010
H.6	110091-011	110092-011
H.7	110091-012	110092-012
J.1	110091-013	110092-013
J.2	110091-014	110092-014

#### POWER SUPPLIES


AC Adapter Power Supply	DC Internal Power Supply
Spare Part No. 110353-001	Spare Part No. 110361-001

---

Desktop Expansion Base Power Supply
Spare Part No. 110599-001

---

External Storage Module Power Supply
Spare Part No. 110448-001

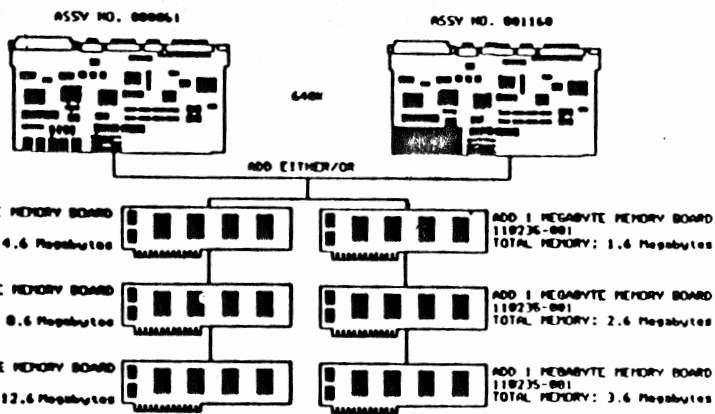

NOTE: THE ABOVE FIGURE DOES NOT REPRESENT ALL POSSIBLE CONFIGURATIONS. MEMORY BOARDS CAN BE INSTALLED IN ANY COMBINATION AND IN ANY AVAILABLE SLOT.

### MEMORY EXPANSION ALTERNATIVES COMPAQ SLT/286 PERSONAL COMPUTER

SYSTEM MEMORY	MEMORY BOARDS ADDED TO			TOTAL MEMORY
	SLOT 1	SLOT 2	SLOT 3	
640 KB	1 MB			1.6 MB
640 KB	1 MB	1 MB		2.6 MB
640 KB	1 MB	1 MB	1 MB	3.6 MB
640 KB	4 MB			4.6 MB
640 KB	1 MB	4 MB		5.6 MB
640 KB	1 MB	1 MB	4 MB	6.6 MB
640 KB	4 MB	4 MB		8.6 MB
640 KB	1 MB	4 MB	4 MB	9.6 MB
640 KB	4 MB	4 MB	4 MB	12.6 MB

NOTE: The above table does not represent all possible configurations. Memory boards can be installed in any combination and in any slot.

## COMPAQ SLT/286 MEMORY UPGRADE CHART