

The following pages were
extracted from the:

*COMPAQ SERVICE
QUICK REFERENCE GUIDE*

SLT 386s/20

COMPAQ SLT 386s/20

COMPATIBILITY LIST

Product	Assy No.	Spare Part No.	Page
---------	----------	----------------	------

SYSTEM BOARDS

386SX System	001382	118359-001	58
--------------	--------	------------	----

MEMORY BOARDS

1 MB Memory Module	001385-001	118357-001	X
2 MB Memory Module	001385-002	118356-001	X
4 MB Memory Module	001394	118358-001	X

VIDEO BOARDS

Advanced Graphics 1024*	109958	114201-001	A-8
Advanced Graphics Memory*	109959	114202-001	X
VGA Pass-Through*	001430	114241-001	X

*Used in Desktop Expansion Base only

MISCELLANEOUS INTERNAL

Serial Interface	000854	110360-001	X
2400-Baud Int Modem	000866	110352-001	X
Backlight Invt	000908	110452-001	X
LED Indicator	001478	118353-001	X
Extender Connector*	000872	110600-001	X
CPU Connector*	001340	110601-001	X
Enhanced 2400-Baud Int Modem	001556	118413-001	X
CD-ROM Adapter	001638	110875-001	X

* Used in Desktop Expansion Base only

MISCELLANEOUS EXTERNAL

Product	Option Part No.	Spare Part No.
External Numeric Keypad	110052-001	110454-001
Desktop Expansion Base	110059-001	N/A
Battery Pack	110287-001	110351-001
Automobile Adapter	110288-001	110708-001
External Battery Charger	110700-001	110706-001
External Storage Module	117079-001	N/A

SLT 386s/20

COMPAQ SLT 386s/20

COMPATIBILITY LIST

FIXED DISK DRIVES

Drive Size	Drive Type	Inter-leave	Inte-grated	Min ROM	Spare Part No.	Controller Assy No.
60 MB	55	1:1	Y	A.1	118355-001	N/A
120 MB	50	1:1	Y	A.1	118360-001	N/A

TAPE DRIVES

Drive Size	Spare Part No.	Tape Cartridge	Spare Part No.
40/60 MB*	112524-001	40 MB (DC 2000)	108142-001
		60 MB	122086-001
80/120 MB*	122087-001	80 MB	116966-001
		120 MB	116967-001

*Used in External Storage Module only.

DISKETTE DRIVES

Size	Spare Part No.
1.2 MB	112566-001 (Used in External Storage Module only.)
360 KB	112567-001 (Used in External Storage Module only.)
1.44 MB	110356-001

CABLE INFORMATION

Cable Function	Used With	Spare Part No.
Mass Storage Power	All FDD	110007-001
FDD Signal	All FDD	110008-001
Diskette Power/Signal	Internal Diskette	110005-001
Signal Cable	Ext Storage Module	110268-001
Power Cable	Ext Storage Module	110270-001
Ground Cable	Display	110503-001
Power Cord	AC Adapter	110543-001
Telephone Cable	Modem	112666-001
Cable Kit (3 Cables)		118368-001

BOARD JUMPER/SWITCH SETTINGS

System Board (001382)*

S1 Settings	Function
S1-1	ON* Reserved
	OFF Reserved
S1-2	ON Power-on password disabled
	OFF* Power-on password enabled

* Default

SLT 386s/20

COMPAQ SLT 386s/20

JUMPER/SWITCH SETTINGS (Cont'd)

External Storage Module

<u>Jumper</u>	<u>Function</u>
Disk	Enables diskette drive
Tape	Enables tape drive

PROCESSOR/COPROCESSOR LOCATIONS

<u>Processor (386SX-20)</u>	<u>Coprocessor (387SX-20)</u>
U56	U75

SYSTEM ROM INFORMATION

System Rom Locations

U73 ODD
U74 EVEN

System Rom Revision (Spare Part No. 118402-001)

<u>Rev</u>	<u>PN on ODD ROM</u>	<u>PN on EVEN ROM</u>
A.1	118283-001	118284-001
050490	118283-002	118284-002
051590	118283-003	118284-003
052990	118283-004	118284-004

POWER SUPPLIES

<u>AC Adapter Power Supply</u>	<u>DC Internal Power Supply</u>
Spare Part No. 118460-001	Spare Part No. 110361-001


Desktop Expansion Base Power Supply

Spare Part No. 110599-001

External Storage Module Power Supply

Spare Part No. 119195-001

ASSY NO. 001382
2 MEGABYTES STANDARD MEMORY

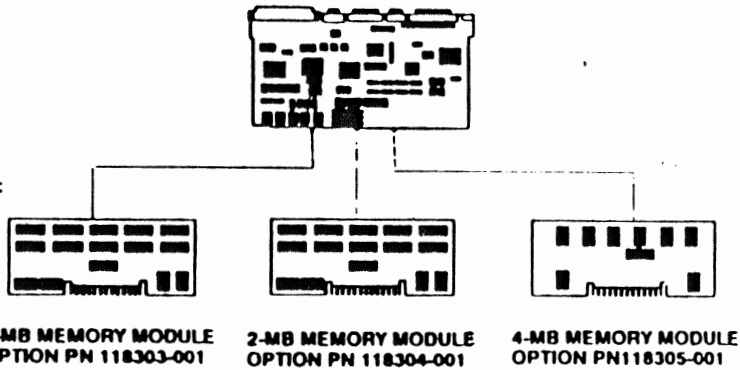

MAXIMUM MEMORY: 14 MB

156065001

MEMORY EXPANSION ALTERNATIVES

COMPAQ SLT 386s/20 PERSONAL COMPUT

SYSTEM MEMORY	MEMORY BOARDS ADDED TO SLOT 1	SLOT 2	SLOT 3	TOTAL MEMORY
2 MB	1 MB			3 MB
2 MB	2 MB			4 MB
2 MB	1 MB	2 MB		5 MB
2 MB	4 MB			6 MB
2 MB	1 MB	4 MB		7 MB
2 MB	2 MB	4 MB		8 MB
2 MB	1 MB	2 MB	4 MB	9 MB
2 MB	4 MB	4 MB		10 MB
2 MB	1 MB	4 MB	4 MB	11 MB
2 MB	2 MB	4 MB	4 MB	12 MB
2 MB	4 MB	4 MB	4 MB	14 MB

NOTE: The above table does not represent all possible configurations. Memory boards can be installed in any combination and in any slot.

COMPAQ SLT 386s/20 MEMORY UPGRADE CHART