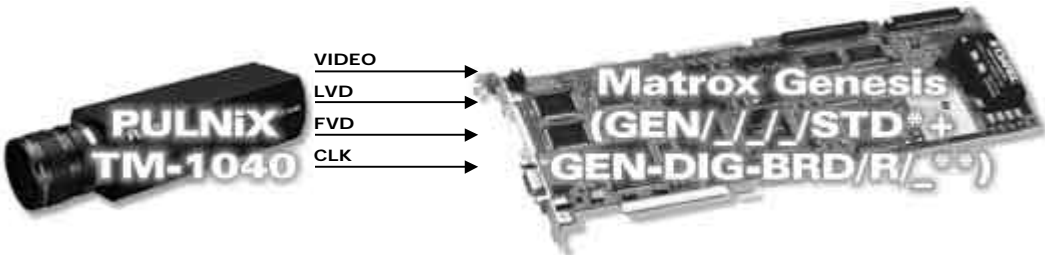
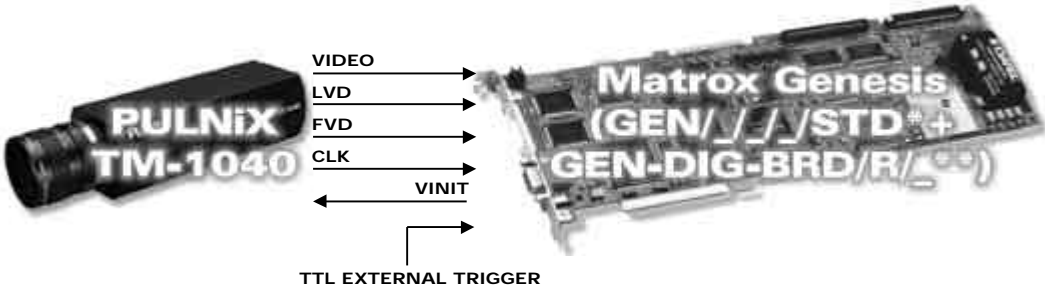


Application Note:

Interfacing non-standard cameras to Matrox Genesis

PULNIX TM-1040

September 24, 1999

Camera Descriptions	<ul style="list-style-type: none"> • 1008 x 1018 x 10-bit @ 30fps. • Dual channel RS-422 digital or analog video output. • Progressive scan. • Internal or external exposure control. • Pixel clock rate: 40 MHz
Interface modes	<ul style="list-style-type: none"> • Continuous, asynchronous reset (pulse width control mode-digital)
Camera Interface Briefs	<p>Mode 1: Continuous</p>  <ul style="list-style-type: none"> • 984 x 1010 x 10-bit @ 30fps. • Dual channel RS-422 digital video. • Progressive scan. • Continuous video. • Matrox Genesis receiving HSYNC (LDV), VSYNC (FDV), PIXEL CLOCK (CLK @ 40 MHz) and video signals from camera. • DCF used: TM1040C.DCF <p>Mode 2: Asynchronous Reset (Pulse Width Control Mode)</p>  <ul style="list-style-type: none"> • 984 x 1010 x 10-bit. • Dual channel RS-422 digital video. • Progressive scan • Matrox Genesis receiving TTL external trigger signal. • Matrox Genesis sends EXPOSURE2 (VINIT) signal to camera: the EXPOSURE2 signal both initiates exposure and controls exposure time. • Matrox Genesis receiving HSYNC (LDV), VSYNC (FDV), PIXEL CLOCK (CLK @ 40 MHz), and video signals from camera. • DCF used: TM1040A.DCF <p><small>*Matrox Genesis Main Board with Grab Module ** Matrox RS-422 Digital Data Input Board</small></p>

Application Note:

Interfacing non-standard cameras to Matrox Genesis

PULNIX TM-1040

September 24, 1999

Camera Interface Details	<p>Modes 1 : Continuous</p> <ul style="list-style-type: none">• Frame rate: Matrox Genesis receives the continuous video from the camera at 30 frames per second.• Exposure time: Exposure time is inversely proportionate to the frame rate (no shutter) or determined by the shutter setting. Refer to the camera manual for more information• Camera switch settings: Switches for this mode should be set as follows: <p>Mode 1: Continuous</p> <table><tr><th>Switches</th><th>Settings</th></tr><tr><td>Shutter Control</td><td>As desired</td></tr><tr><td>Mode Control</td><td>0</td></tr><tr><td>UP/DWN</td><td>UP</td></tr></table> <p>Mode 2: Asynchronous Reset (Pulse Width Control Mode)</p> <ul style="list-style-type: none">• Once it has received the external trigger signal, Matrox Genesis sends the EXPOSURE2 (VINIT) signal to the camera with a width equal to the desired exposure.• Frame rate: The frame rate is determined by the frequency of the external trigger signal.• Exposure time: The active and inactive periods of the EXPOSURE2 (VINIT) signal is the exposure time. The default exposure time for this DCF is equal to 3.82 ms. In order to change the width and deployment time of EXPOSURE2 (VINIT) use the Exposure Settings menu tab in Matrox Intellicam. Consult the Matrox Intellicam User Guide for more information.• Camera switch settings: Switches for this mode should be set as follows: <p>Mode 2: Asynchronous Reset</p> <table><tr><th>Switches</th><th>Settings</th></tr><tr><td>Shutter Control</td><td>9</td></tr><tr><td>Mode Control</td><td>2</td></tr><tr><td>UP/DWN</td><td>DWN</td></tr></table>	Switches	Settings	Shutter Control	As desired	Mode Control	0	UP/DWN	UP	Switches	Settings	Shutter Control	9	Mode Control	2	UP/DWN	DWN																			
Switches	Settings																																			
Shutter Control	As desired																																			
Mode Control	0																																			
UP/DWN	UP																																			
Switches	Settings																																			
Shutter Control	9																																			
Mode Control	2																																			
UP/DWN	DWN																																			
Cabling Requirements	<p>Mode 1: Continuous</p> <ul style="list-style-type: none">• DBHD100-TO-OPEN cable and GEN/DIG/BRD/R/_ board required for digital data, synchronization and control signals.• Connections between the 31-pin connector of the camera and the 100-pin connector of the GEN-DIG-BRD/R/_ are as follows: <table><tr><th colspan="2">GEN-DIG-BRD/R/_ (100-pin connector)</th><th></th><th colspan="2">PULNiX TM-1040 (31-pin connector)</th></tr><tr><th>Pin name</th><th>Pin no.</th><th></th><th>Pin name</th><th>Pin no.</th></tr><tr><td>CLOCK, INPUT, +</td><td>39</td><td>←</td><td>CLK+</td><td>01</td></tr><tr><td>CLOCK, INPUT, -</td><td>40</td><td>←</td><td>CLK-</td><td>17</td></tr><tr><td>HSYNC, INPUT, +</td><td>33</td><td>←</td><td>LVD+</td><td>02</td></tr><tr><td>HSYNC, INPUT, -</td><td>34</td><td>←</td><td>LVD-</td><td>18</td></tr><tr><td colspan="5">continued</td></tr></table>	GEN-DIG-BRD/R/_ (100-pin connector)			PULNiX TM-1040 (31-pin connector)		Pin name	Pin no.		Pin name	Pin no.	CLOCK, INPUT, +	39	←	CLK+	01	CLOCK, INPUT, -	40	←	CLK-	17	HSYNC, INPUT, +	33	←	LVD+	02	HSYNC, INPUT, -	34	←	LVD-	18	continued				
GEN-DIG-BRD/R/_ (100-pin connector)			PULNiX TM-1040 (31-pin connector)																																	
Pin name	Pin no.		Pin name	Pin no.																																
CLOCK, INPUT, +	39	←	CLK+	01																																
CLOCK, INPUT, -	40	←	CLK-	17																																
HSYNC, INPUT, +	33	←	LVD+	02																																
HSYNC, INPUT, -	34	←	LVD-	18																																
continued																																				

Application Note:

Interfacing non-standard cameras to Matrox Genesis

PULNIX TM-1040

September 24, 1999

Cabling Requirements (continued)	GEN-DIG-BRD/R/_ (100-pin connector)			PULNiX TM-1040 (31-pin connector)		
	Pin name	Pin no.		Pin name	Pin no.	
	VSYNC, INPUT, +	35	←	FVD+	03	
	VSYNC, INPUT, -	36	←	FVD-	19	
	GROUND	50		GND	04	
	GROUND	37		GND	16	
	DATA, INPUT, 0+	01	←	D0+	06	
	DATA, INPUT, 0-	02	←	D0-	22	
	DATA, INPUT, 1+	03	←	D1+	07	
	DATA, INPUT, 1-	04	←	D1-	23	
	DATA, INPUT, 2+	05	←	D2+	08	
	DATA, INPUT, 2-	06	←	D2-	24	
	DATA, INPUT, 3+	07	←	D3+	09	
	DATA, INPUT, 3-	08	←	D3-	25	
	DATA, INPUT, 4+	09	←	D4+	10	
	DATA, INPUT, 4-	10	←	D4-	26	
	DATA, INPUT, 5+	11	←	D5+	11	
	DATA, INPUT, 5-	12	←	D5-	27	
	DATA, INPUT, 6+	13	←	D6+	12	
	DATA, INPUT, 6-	14	←	D6-	28	
	DATA, INPUT, 7+	15	←	D7+	13	
	DATA, INPUT, 7-	16	←	D7-	29	
	DATA, INPUT, 8+	17	←	D8+	14	
	DATA, INPUT, 8-	18	←	D8-	30	
	DATA, INPUT, 9+	19	←	D9+	15	
DATA, INPUT, 9-	20	←	D9-	31		
EXPOSURE2, OUTPUT, TTL	88*	→	VINIT/VD	20*		
* This connection is not required for this mode, however allows this cable to be used with both digital modes.						
Mode 2: Asynchronous Reset (Pulse Width Control Mode)						
• DBHD100-TO-OPEN cable and GEN/DIG/BRD/R/_ board required for digital data, synchronization and control signals.						
• The connections between the 100-pin connector of the GEN-DIG-BRD/R/_ and the 31-pin connector of the camera are as in Mode 2: Continuous mode with the exception of the following additional connection:						
GEN-DIG-BRD/R/_ (100-pin connector)			PULNiX TM-1040 (31-pin DC connector)			
Pin name	Pin no.		Pin name	Pin no.		
EXPOSURE2, OUTPUT, TTL	88	→	VINIT/VD	20		

Application Note:

Interfacing non-standard cameras to Matrox Genesis

PULNIX TM-1040

September 24, 1999

Cabling Requirements (continued)

- TTL external trigger source should be connected to the TTL Trigger Input of the IMG-7W2-TO-5BNC cable.
- To use an RS-422 external trigger input, modify the DCF using Matrox Intellicam (refer to the Matrox Intellicam User Guide for more information), and add the following connections between the 100-pin connector of the GEN-DIG-BRD/R/_ and the external trigger source:

GEN-DIG-BRD/R/_ (100-pin connector)		External trigger source	
Pin name	Pin no.		Pin name
TRIGGER, INPUT, +	47	←	"RS-422 TRIGGER+"
TRIGGER, INPUT, -	48	←	"RS-422 TRIGGER-"

The DCF(s) mentioned in this application note can be found on the MIL and Native Library CD, or our FTP site ([ftp.matrox.com](ftp:matrox.com)). The information furnished by Matrox Electronics System, Ltd. is believed to be accurate and reliable. Please verify all interface connections with camera documentation or manual. Contact your local sales representative or Matrox Sales office or Matrox Imaging Applications at 514-822-6061 for assistance.

Corporate Headquarters:
Canada and U.S.A.
Matrox Electronic Systems Ltd.
 1055 St.Regis Blvd.
 Dorval, Quebec, Canada
 H9P 2T4
 Tel: (514) 685-7230
 Fax: (514) 822-6273

Sales Offices:
U.K.
Matrox (UK) Ltd.
 Sefton Park, Stoke Poges
 Buckinghamshire
 U.K. SL2 4JS
 Tel: +44 (0) 1753 665500
 Fax: +44 (0) 1753 665599

France
Matrox France SARL
 2, rue de la Couture,
 Sillc 225
 94528 Rungis Cedex
 Tel: (0) 1 45-60-62-00
 Fax: (0) 1 45-60-62-05

Germany
Matrox GmbH
 Inselkammerstr.8
 D-82008
 Unterhaching
 Germany
 Tel: 089/614 4740
 Fax: 089/614 9743

Asia Pacific
Matrox Asia Liaison Office
 Rm. 1901, 19/F, Workington
 Tower,
 78 Bonham Strand E.,
 Sheung Wan, Hong Kong.
 Tel: 852.2877.5387
 Fax: 852.2537.9530

